

# Agema Open Networking Platform AG 9032

Designed for high-capacity applications, Agema AG9032 switch provides high-density low latency 100GbE connectivity in a resilient package making it ideal for enterprise and data center Top of the Rack (ToR) deployment.

The AG9032 is a 32 x 100GbE (QSFP28) ports high bandwidth and high density switch. The device is pre-loaded with ONIE (Open Network Install Environment) and a choice of modular extensible Network Operating Systems (NOS) benefiting users to achieve future proof SDN/NFV capable solution, network scalability, flexibility and cost effectiveness. It delivers 3.2 Tbps of switching fabric with ultra low sub-µsec latency, and also provides 1+1 resilient power in a very compact 1RU chassis.

### Key Features


- 1RU high-density 32 ports 100GbE ToR.
- Up to 3.2 Tbps of switching I/O bandwidth and available non-blocking cut-through switching fabric.
- Open automated configuration and zero-touch provisioning capabilities to simplify the management of network environments.

### High Bandwidth

As bandwidth-intensive applications such as Web 2.0, virtualization, High Performance Computing (HPC) and Network Attached Storage (NAS) continue to proliferate within data centers, 100 GbE provides a cost effective way to increase throughput and seamlessly deliver customer service level agreements.

### High Availability

The AG9032 has two slots for hot-swappable PSUs (Power Supply Units) and 3 fan trays. Also QSFP28 modules can be easily removed and replaced with no interruption to the network. These hot-swappable modules guarantee the continued delivery of essential services.

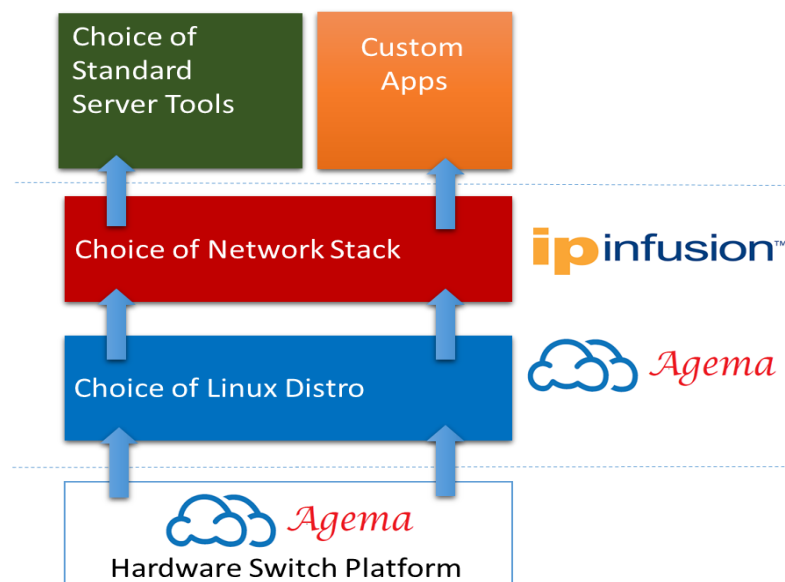

- Open networking platform supporting a choice of NOS: Agema OS & OcNOS™.
- Advance Networking features in a hybrid box.



## Technical Specification

Ordering Information	Physical	Regulatory Compliance	Performance
32 QSFP28 ports 1-RJ45 Serial console port 1- RJ45 management port 1 USB port 2 slots for PSUs 3 slots for fans <b>Power Supplies &amp; Fans</b> 2 Hot-swappable AC power supply (shipped with single PSU) 3 Hot-swappable FAN tray <b>Options:</b> <ul style="list-style-type: none"> <li>Bare Metal</li> <li>Pre-loaded White Box</li> </ul>	32 line-rate 100 GbE QSFP28 1 USB-A type port 1 RJ45 console port 1 RJ45 Management Port CPU: Intel Rangeley C2558 128GB SSD 8GB DDR3 RAM Dimension (WxDxH): 438.5x460x43 mm Weight: 20.94 lbs (9.5 kg) Power supply: 100–240 VAC 50/60 Hz Max. power consumption: 800 Watts Operating temperature: 0 to 40°C Operating relative humidity: 10 to 90% RH	Safety: EN 60950-1, UL/ CSA 60950-1, IEC 60950-1, CCC Emissions: AS/NZS CISPR 22: Class A, ICES-003, Issue Class A, EN 55022: Class A, VCCI Class A, FCC CFR 47 Part 15, Sub-part B Class A, CCC Immunity: EN 300 386, EN55024, EN 61000-3-2, EN 61000-3-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-5, EN 61000-4-6, EN61000-4-8, EN61000-4-11	Integrated Packet Buffer Memory: 16 MB MAC Address: Max 136K L3 LPM: 128K (IPV4) 85K (IPV6) Switch Fabric: 3.2 Tbps IPv4 host table size: 8k min/72k max. IPv6 host table size: 4K min/36 max. L2 Multicast Table: 16K L3 multicast Groups: 64K Support jumbo frames up to 9K

## Software Specification

Features	Agema Systems, Inc Agema OS	IP Infusion OcNOS™
Basic Switching Features	✓	✓
Routing Features	✓	✓
Data Center Features	✓	✓
SDN Features	✓	✓
Service Provider Networking Features (Comprehensive MPLS and Carrier Ethernet)		✓



©2015. All Rights Reserved. Information in this document is subject to change without notice.  
 Agema Systems, Inc. assumes no responsibility for any errors that may appear in this document.

Learn More, visit <http://www.agemasystems.com/>